


1. Product specification

Technical data

Article number	153975
Type	FN080-SDQ.6N.V7
Designation	Axial fan with sickle blades
Rated values	3~400V±10% D/Y 50Hz P ₁ 1.80/1.15kW 3.90/ 2.20A ΔI=5% 900/ 700/min COSY 0,68 65°C
Electrical connection	Terminal box K62
Min. operating temperature °C	-40
Mounting type terminal box	Mounted on Stator
Type of protection	IP54
Thermal class	THCL155
Connection diagram	1360-108XA
Rating plate	1x fixed
Fitting position	H/Vu/Vo
Motor protection	thermal contact
Impregnation	Moisture and hot climate protection
Quality of bearings	ball bearing with long-time lubrication
Material Rotor	Aluminium
Painting rotor	Rotor 1 coat painted
colour rotor	RAL 9005 (jet black)
Material blades	Aluminium
Painting impeller	1 coat painted
Colour blades	RAL 9005 (jet black)
Guard grille type	ring grille
Painting pipe	Bell mouth 1 coat paint
Colour pipe	RAL 9005 (jet black)
Painting mot.suspens	Motor suspension 1 coat paint
colour suspension	RAL 9005 (jet black)
Weight kg	48,80
ErP Data	Efficiency η_{statA} : 36.8 % Efficiency: $N_{actual} = 41.5 / N_{target} = 40^*$ *ErP 2015

2. Characteristic curve

Frequency: 50 Hz

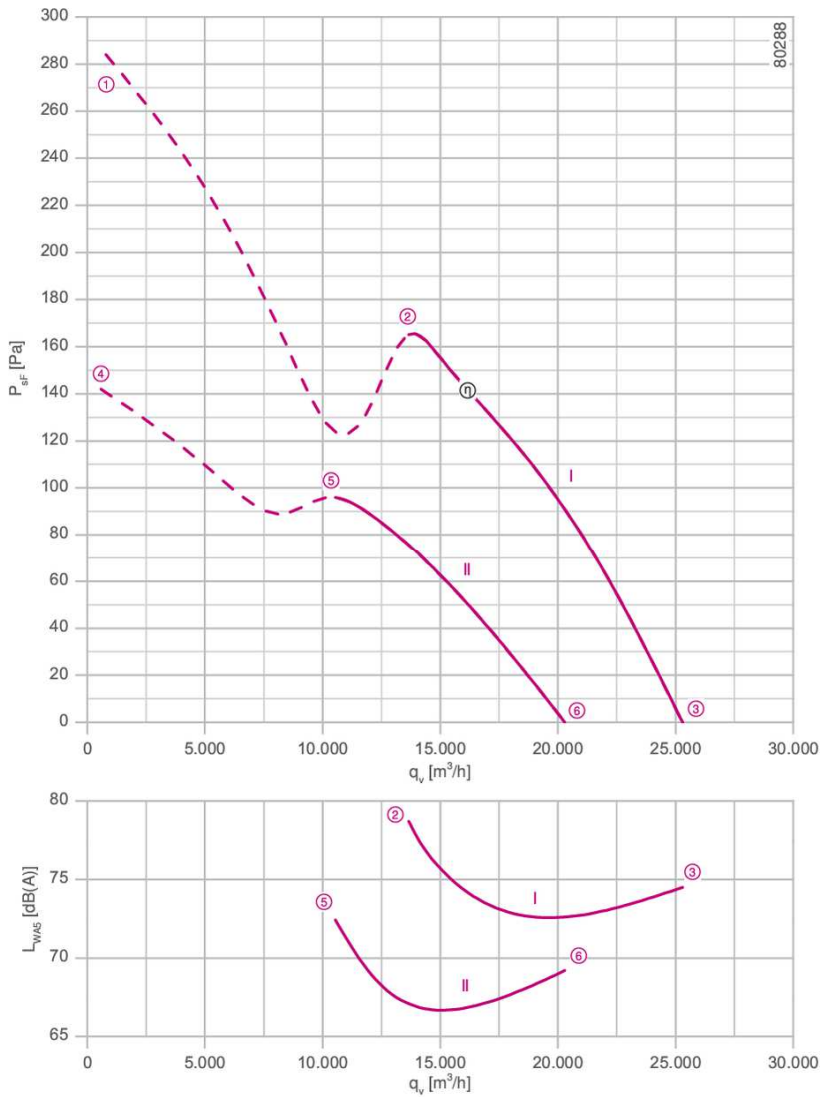

UmbruchKL

Characteristic curve


Frequency: 50 Hz

Measured in full bell mouth without guard grille in installation type A according to ISO 5801.

The Royal League

Die Königsklasse

Hata! Belgede belirtilen stilde metne
Hata! Belgede belirtilen stilde metne

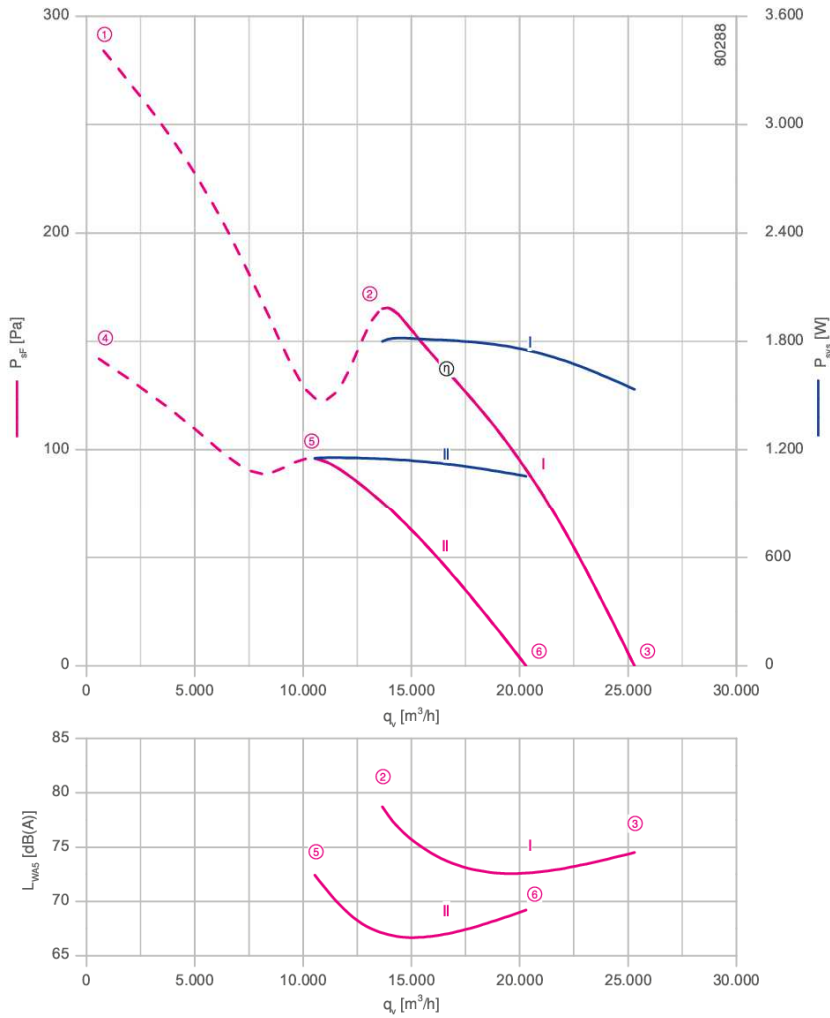

I = 400 V, II = 400 V


Operating point		①	②	③	④	⑤	⑥
Characteristic curve		I	I	I	II	II	II
Connection		Δ	Δ	Δ	Y	Y	Y
Voltage	V	400	400	400	400	400	400
Input power	W	2400	1800	1550	1300	1150	1050
Current	A	4,80	3,90	3,60	2,50	2,20	2,00
Speed	min^{-1}	860	900	920	600	700	740

Hata! Belgede belirtilen stilde metne
 Hata! Belgede belirtilen stilde metne

The Royal League

Die Königsklasse

3. Drawing

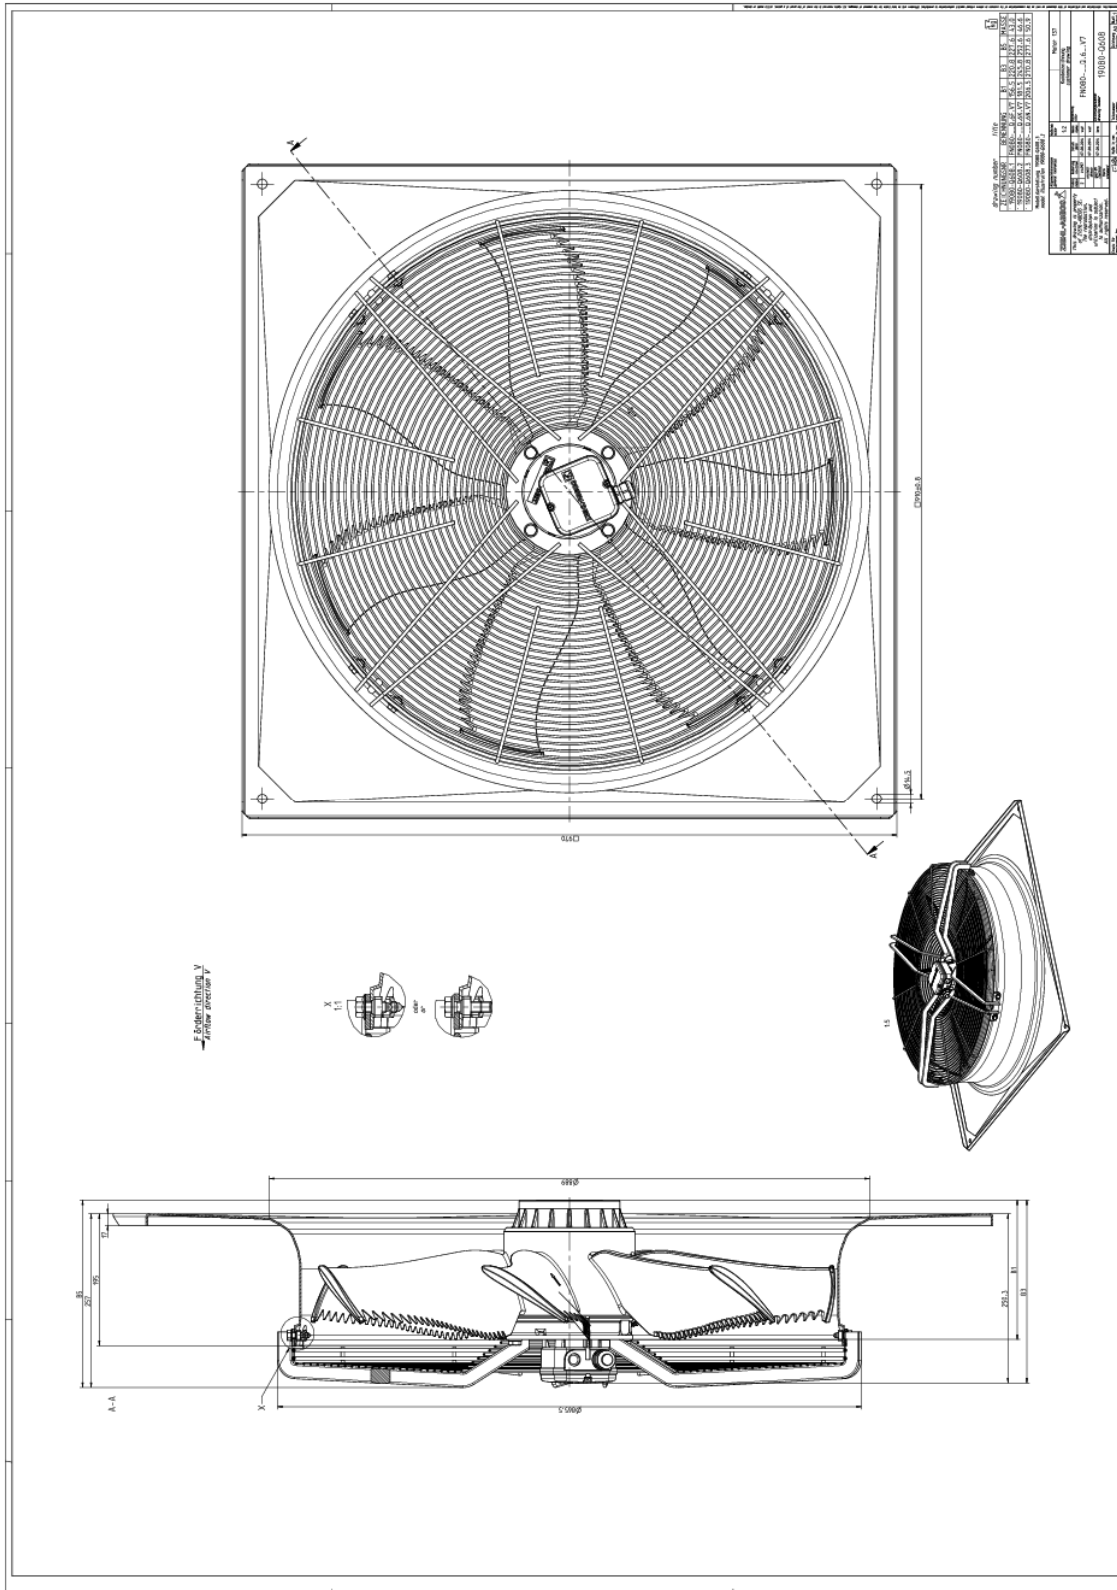

Dimensions in mm

Shown drawing is just to show the dimensions of the fan.

www.ziehl-abegg.com
 Erstellungsdatum

Movement by Perfection | Bewegung durch Perfektion


4. Connection diagram

1360-108XA

3~ motor, 2 speeds (Δ/Y switch over) with thermostatic switch (if built in). Without bridge when using speed change-over switch.

- U1 brown
- V1 blue
- W1 black
- U2 red
- V2 grey
- W2 orange
- TB white

High speed/D-connection

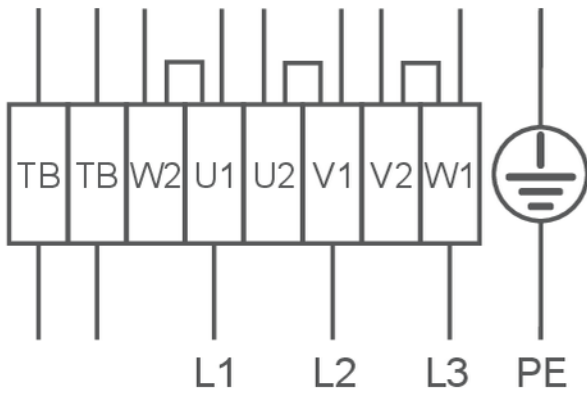

Low speed/Y-connection

